

LINKAGE MISTBLOWER


# CÉFIRO



### TECHNICAL CHARACTERISTICS

Exclusive deposit design FG Group
Capacities: 200, 300, 400, 600, 800 and 1,000 L
Manual override with tap and pressure gauge
Cleaning internal robot
Ultra-clean output filters
Inhalation filter with valve
Chassis "Mixed"
Double adjustable nozzle holder with anti-drop
Folding side step (600-800-1,000 L)
V adjustable deflector
Reinforced PTO shaft G7 1,200mm
5 meters charger 50 floating

	Céfiro				
	200 L	300 L	400 L	600 L	800 L
Length (mm)	1060	1340	1500	1500	1910
Width (mm)	1010	1010	1620	1480	1580
Height (mm)	1140	1160	1550	1590	1615
Weight(kg)	170	180	200	375	400

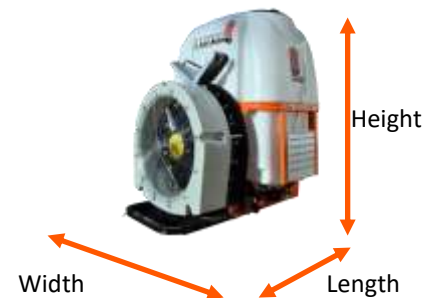

Model	Performance			
700 OASIS	Angle of attack	(R.P.M.)	(m <sup>3</sup> /h)	Speeds
	30°	540	40.700	
	35°	540	48.500	
Predistri.	Clutch	Nº Blades	Nº Gets	1 + P.M.
No	No	8 Nylon	14 +2	

Model	Performance			
800 OASIS	Angle of attack	(R.P.M.)	(m <sup>3</sup> /h)	Speeds
	30°	540	54.000	
	35°	540	56.000	
Predistri.	Clutch	Nº Blades	Nº Gets	2 + P.M.
No	No	8 Nylon	14 +2	