

LINKAGE MISTBLOWER

# MISTRAL



## TECHNICAL CHARACTERISTICS

Exclusive deposit design FG Group

Capacities: 800, 1,000 and 1,200 liters

Manual override with tap and pressure gauge

Cleaning internal robot

Ultra-clean output filters

Inhalation filter with valve


Double adjustable nozzle holder with anti-drop

V adjustable deflector

Reinforced PTO shaft G7 1,200mm

5 meters charger 50 floating

	Mounted Mistral	
	1000 L	1200 L
Length (mm)	1450	1630
Width (mm)	1450	1500
Height (mm)	1600	1800
Weight (kg)	400	450

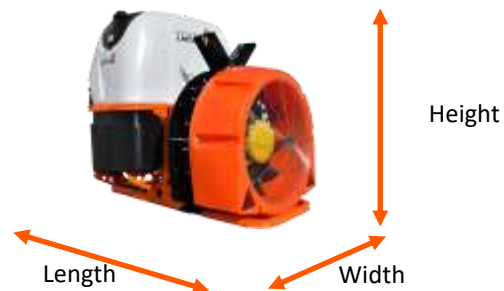

Model	Performance			
920 Fieni MISTRAL	Angle of attack	Speed(R.P.M.)	Flow (m <sup>3</sup> /h)	C.V.
	Position 1	540	78.300	26.5
	Position 2	540	81.300	36.9
	Position 3	540	83.880	47.5
Predistributor	Clutch	N° Blades	N° Gets	
No	Yes	9 Nylon VNS	14 or 28	