

TRAILED MISTBLOWER

# OASIS ANDALUCÍA



## STANDARD EQUIPMENT

Capacities: 2,000, 3,000 and 4, 000 liters.

Exclusive design deposit FG Group

Double sonar LT (vegetation detector)

Electric remote control 2 ways (on/off)

Straight drawbar tow eye

Adjustable jockey wheel

Chock brake (2,000/3,000)

Hydraulic brake model 4,000 L

Wheels 2,000/3,000L: 11,5/80-15,3 14PR

Treading 2,000/3,000L: 1,800 mm

Wheels 4,000L: 400/60 15.5 14PR

Treading 4,000L: 1,900 mm

Lights and retroreflectors

Cleaning internal robot

Double adjustable nozzle holder with anti-drop

V adjustable deflector


Homokinetic PTO shaft 1,500 mm

5 meters charger 50 floating

Circuit-cleaner tank 400 L (Mod. 2,000 L)

Circuit-cleaner tank 300 L (Mod. 3,000 L)

	Andalucía		
	2000 L	3000 L	4000 L
Length (mm)	4,570	4,570	5,080
Width (mm)	2,220	2,220	2,370
Height (mm)	1,670	2,030	2,030
Weight (kg)	900	990	1,100

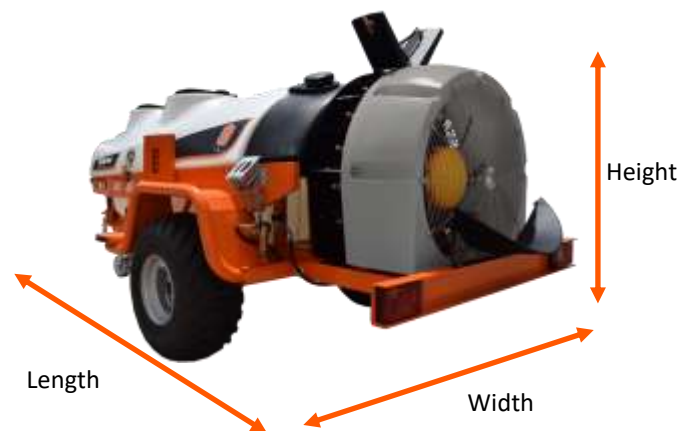

Turbine	Angle	R.P.M	m <sup>3</sup> /h	Multiplier
900 mm	30°	540	70,000	Speed 2 + P.M
	35°	540	80,000	
Predistributor	Clutch	Nº shovels	Nº gets	Enveloping
No	Yes	10 Nylon + fiber	14+2	Polyethylene